


**REMACHE TUBULAR DIN 7337-B INOXIDABLE A-2/INOXIDABLE A-2**  
**STAINLESS STEEL AISI 304/STAINLESS STEEL AISI 304 BLIND RIVET DIN 7337-B**

**FICHA TÉCNICA**  
**TECHNICAL DATA SHEET**



<b>Cuerpo / Body</b> <b>Material / Material:</b> <b>Recubrimiento / Coating:</b>	Acero inoxidable A-2 / Stainless steel AISI 304 Pulido / Polish
<b>Mandril / Mandrel</b> <b>Material / Material:</b> <b>Recubrimiento / Coating:</b>	Acero inoxidable A-2 / Stainless steel AISI 304 Pulido / Polish

**DATOS TÉCNICOS / TECHNICAL DATA**

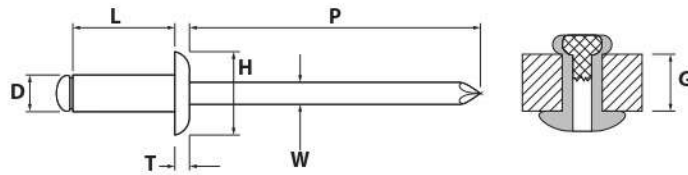

**RESA2**

Ø	D	H	T	P min.	W nom.	CIZALLA TÍPICA Typical shear Cisaillement typique	TRACCIÓN TÍPICA Typical tensile Traction typique	Ø AGUJERO Hole Ø Ø Foret m.m.
m.m.	m.m.	m.m.	m.m.	m.m.	m.m.	N	N	m.m.
<b>3,2</b>	3,05-3,28	5,8-6,5	0,8-1,2	27	1,75	535	650	3,3-3,4
<b>4,0</b>	3,85-4,08	7,0-8,0	0,9-1,5	27	2,08	850	1.020	4,1-4,2
<b>4,8</b>	4,65-4,88	8,5-9,5	1,0-1,6	27	2,58	1.160	1.420	4,9-5,0

ØxL	G
m.m.	m.m.
<b>3,2x 6</b>	0,5-3
<b>3,2x 8</b>	3-5
<b>3,2x10</b>	5-6,5
<b>3,2x12</b>	6,5-8,5
<b>3,2x15</b>	9,5-11,5
<b>4,0x 6</b>	1-1,25
<b>4,0x 8</b>	2,5-4,5
<b>4,0x10</b>	4,5-6,5
<b>4,0x12</b>	6,5-8,5
<b>4,0x16</b>	10-12

ØxL	G
m.m.	m.m.
<b>4,8x 8</b>	2-4
<b>4,8x10</b>	4-6
<b>4,8x12</b>	6-8
<b>4,8x14</b>	7-9
<b>4,8x16</b>	8-11
<b>4,8x18</b>	11-13
<b>4,8x20</b>	13-16
<b>4,8x25</b>	16-19
<b>4,8x30</b>	21-25